

The fine difference in
Swiss quality.



Sablux

Sablux. Superficial, from the bottom up.

Sablux Technik AG is an internationally renowned Swiss company leading in consulting, planning, development and realization of innovative concepts for sand blasting technology, processing technology and engineering.

Our company was founded in 1935 and has since that time been producing metal fabricates for national and international markets with over 30 employees. Since 1956 we have been developing and manufacturing high quality sand blasting units in own production for manual or automatic treatment of surfaces.

The name Sablux stands for excellent quality for the entire product palette with its own Swiss production.

The high level of know-how and the modern CNC machine park guarantee high reproducible quality. Our team of specialists always has ideal solutions for individual requirements.

Surface technology is our speciality.





1935	Foundation of the trade workshop. Reformation into a joint-stock company
1975	Purchase of Sablux Technik AG founded in 1956
1986	Expansion of the production, relocation from Dübendorf to Bachenbülach into own production site
1998	Purchase of a further property across from the existing production to expand the sand blasting technology
1999	Certification according to ISO 9001
2002	Modernisation of the CNC-machine park. Focal points: Punching-laser centre FinnPower, press brake
2004	New organisation of sales «Cheminée Cheminée ovens» for a partnership close to the customers
2006	Opening of the new Cheminée-Exhibit in September
2009	The department «Cheminée» is handed over to the German chimnax construction company Kleining
2010	The departments Unit construction Metalworking and sand blasting technology merge to form Sablux Technik AG
2011	Integration of the department «Micro sand blasting technology» of Xintech Systems AG

Content

Manufacture and Production	4
Standard cabins	8
Dust separator	14
Blasting procedure	16
Blasting media processing	17
Micro sand blasting technology XINTECH	18
Special units	24
Open jet technology	29
Blasting rooms Containers	30
Special products	31
Blasting media	32
Service Services	34

Sablux

The fine difference

Competence in all areas.

As a competent production company in metal processing we manufacture complex metal constructions in highest production accuracy.

Longstanding experience, broad know-how and high measure of flexibility characterize our teams of specialists.

CAD-recorded construction and computer-automated manufacture (CAM) are further guaranteed for perfect product services.

Our strengths:

Finest metalworking.


Single and serial production. Prototypes.

Experience in engineering and manufacture of machine panelling more than 25 years.

Welded, lacquered and assembled.

Complex metal constructions, e.g. switch cabinets, cabins, frames, bays, etc.

You are searching for solutions.
We have them.

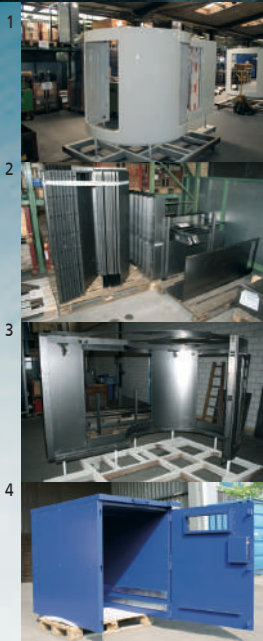



Sablux work stations



Sablux

The fine difference



5

6

- 1 Pre-assembly of a machine panelling.
- 2 Component of a machine panelling.
- 3 Machin panelling.
- 4 Special production of a palette lock.
- 5 Serial production dust separator casing.
- 6 Machine panelling.



The core of the Sablux production. Fully automatic punching-| laser centre Finn-Power LP6.

Option of manless operation (ghost shift).

Cutting threads and embossing one step.

Steel up to 8 mm.

Chrome steel up to 5 mm.

Aluminium up to 5 mm.

Work range 1500 x 3000 mm.

With readjustment 1500 x 4000 mm.

Hydr. brake press, Beyeler: 250 tons

Brake length: 3m und 4m.



Your advantages:

Technically sophisticated products.

CE-conform, safe devices.

ISO 9001:2008 certified.

Modular structure.
Exchangeable. Expandable.

Strong metal construction for high stability.

Powder coated casings look good for a long time.

Device design with angled profile punches for more strength.



With raw force. With fine touch. With state-of-the-art technology.




Sablux

The fine difference



Exhibitor at specialist fairs.



Sablux SX 155 S

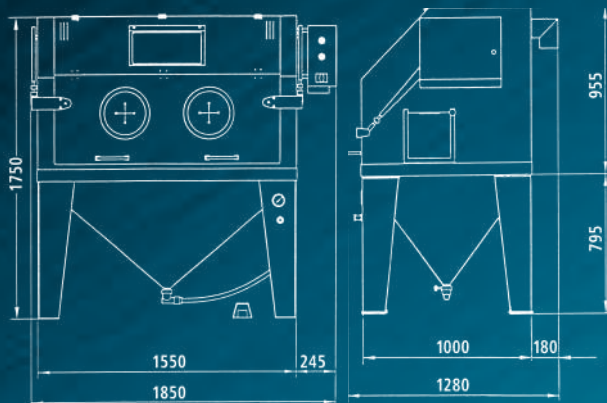

Exterior dimensions:	Width	1'550 mm + 300 mm (Switchbox + lifting arm)
	Depth	1'080 mm (without curve + aspiration)
	Height	1'750 + 550 mm (opened cabin) 1'750 mm (closed cabin)
Interior dimensions:	Width	1'545 mm
	Depth	890 mm ; 970 mm (without ascending sifter)
	Height	780 mm ; 840 mm (without gun holder)
Weight:	approx. 340 kg	
Pressurized air connection:	G 3/4" with screw coupling. 19 mm inside diameter.	
Grid:	3-piece, carrying capacity 340 kg surface load (higher load upon inquiry).	

Sandblasting gun:	Injector principle high performance gun «Power-shot» type 140, Standard equipment: Borcarbide sand nozzle + holder Ø 11 mm, Sand nozzle ceramic optional. Air nozzle made of stainless steel Ø 5 mm. Air consumption approx. 60 m ³ /h bei 400 kPa (4 bar) operation pressure. When using sand nozzles with smaller or larger Ø the air nozzles need to be adapted.
Gun holder:	Adjustable on all sides, mounted on full-length crossbeam.
Foot pedal:	Electrical, with protective hood IP 65.
Sand dispenser:	To regulate the sand quantity, easily removable for replacement of blasting material.
Cabin cover:	Front wall 2-piece, is pushed up vertically by 2 handles, weight balance through gas pressure springs. Cabin is accessible by crane.
Window:	Without blind spot, double glazing with attrition-proof glass, replaceable in seconds.
Lighting:	2 fluorescent pipes with 55 W, 230 V each, mounted in dustproof cabins on the roof of the cabin.
Sideshift:	In both side walls 250 x 240 mm, to slide long parts through, additionally covered with a rubber curtain.
Hand holes:	Sealed twice with wear proof special rubber (optionally with permanent rubber gloves).
Switchbox:	Dustproof, mounted on the right of the cabin, with main switch (lockable), commando switch, contactors and control fuse.
Electr. connection:	230/400 V, 50 Hz. Connecting value: kW depending on dust separator (special voltages possible).
Manometer:	In the right cabin stand, measuring range 0-1'000 kPa (0-10 bar).
Pressure reducing valve	Self-ventilating, in the right cabin stand, control range 0-900kPa (0-9 bar).
Safety switch:	Jet automatically interrupted when cabin is opened (suva conform).
Dust exhaust:	Connecting adapter at the back wall (Ø 100 mm).
Dust separator:	The Sablux-offer includes a selection of different dust separators. The right adjustment is the requirement for ideal operation of the blasting unit.
1	Rotating drum Ø 565mm, to process larger bulk material in smaller batches
2	Rotating drum aggregate type DK 141, drums Ø 565mm with various hole intervals allow the economic processing of your bulk material. The integrated outlet valve guarantees ideal cleaning of the pieces after processing.
3	Double rotary drum aggregate type DK 75 drums Ø 260mm with various hole intervals allow the economic processing of your bulk material.
4	Manual turntable, useable instead of the middle grid, available in the Ø 600mm and Ø 750mm. Central loads up to 300 kg possible.
5	Turntable drive Ø 600 to Ø 750mm with 24V safety voltage, unit equipped with double foot pedal.


Sablux SX 115 S

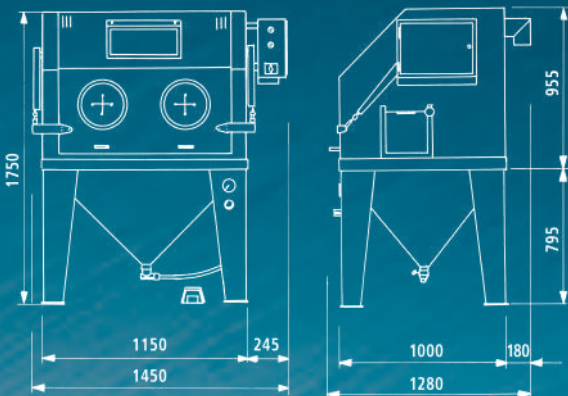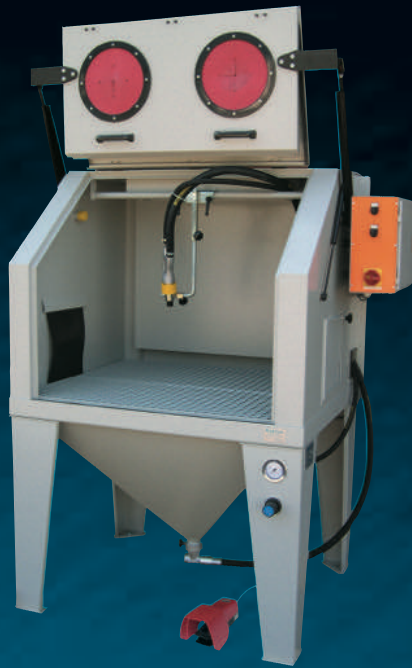

Exterior dimensions:	Width	1'150 mm + 300 mm (Switchbox + lifting arm)
	Depth	1'080 mm (without curve + aspiration)
	Height	1'750 + 550 mm (opened cabin) 1'750 mm (closed cabin)
Interior dimensions:	Width	1'145 mm
	Depth	890 mm ; 970 mm (without ascending sifter)
	Height	780 mm ; 840 mm (without gun holder)
Weight:	approx. 250 kg	
Pressurized air connection:	G 3/4" with screw coupling. 19 mm inside diameter.	
Grid:	2-piece, carrying capacity 200 kg surface load (higher load upon inquiry).	

Sandblasting gun:	Injector principle high performance gun «Power-shot» type 100, Standard equipment: Borcarbide sand nozzle + holder Ø 10 mm, Sand nozzle ceramic optional. Air nozzle made of stainless steel Ø 4 mm. Air consumption approx. 40 m ³ /h bei 400 kPa (4 bar) operation pressure. When using sand nozzles with smaller or larger Ø the air nozzles need to be adapted.
Gun holder:	Adjustable on all sides, mounted on full-length crossbeam.
Foot pedal:	Electrical, with protective hood IP 65.
Sand dispenser:	To regulate the sand quantity, easily removable for replacement of blasting material.
Cabin cover:	Front wall 2-piece, is pushed up vertically by 2 handles, weight balance through gas pressure springs. Cabin is accessible by crane.
Window:	Without blind spot, double glazing with attrition-proof glass, replaceable in seconds.
Lighting:	2 fluorescent pipes with 55 W, 230 V each, mounted in dustproof cabins on the roof of the cabin.
Sideshift:	In both side walls 250 x 240 mm, to slide long material through, additionally covered with a rubber curtain.
Hand holes:	Sealed twice with wear proof special rubber (optionally with permanent rubber gloves).
Switchbox:	Dustproof, mounted on the right of the cabin, with main switch (lockable), commando switch, contactors and control fuse.
Electr. connection:	3 x 400 W, 50 Hz. Connecting value: kW depending on dust separator (special voltages possible).
Manometer:	In the right cabin stand, measuring range 0-1'000 kPa (0-10 bar).
Pressure reducing valve	Self-ventilating, in the right cabin stand, control range 0-900kPa (0-9 bar).
Safety switch:	Jet automatically interrupted when cabin is opened (suva conform).
Dust exhaust:	Connecting adapter at the back wall (Ø 100 mm).
Dust separator:	The Sablux-offer includes a selection of different dust separators. The right adjustment is the requirement for ideal operation of the blasting unit.
1	Rotating drum Ø 565mm, to process larger bulk material in smaller batches
2	Rotating drum aggregate type DK 141, drums Ø 565mm with various hole intervals allow the economic processing of your bulk material. The integrated outlet valve guarantees ideal cleaning of the pieces after processing.
3	Double rotary drum aggregate type DK 75 drums Ø 260mm with various hole intervals allow the economic processing of your bulk material.
4	Manual turntable, useable instead of the middle grid, available in the Ø 600mm and Ø 750mm. Central loads up to 300 kg possible.
5	Turntable drive Ø 600 to Ø 750mm with 24V safety voltage, unit equipped with double foot pedal.

Sablux SX 90 S

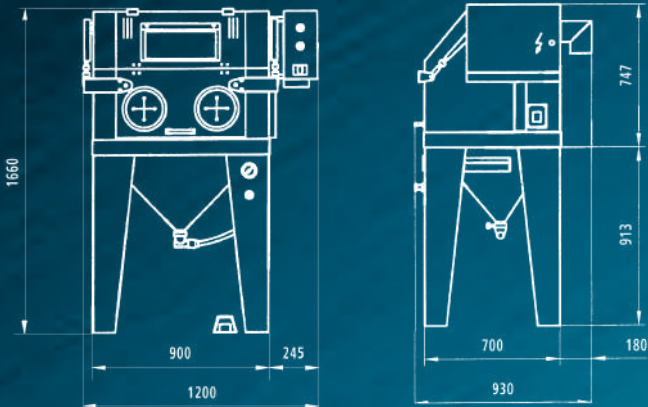

Exterior dimensions:	Width	900 mm + 300 mm (Switchbox + lifting arm)
	Depth	780 mm (without curve + aspiration)
	Height	1'660 + 320 mm (opened cabin) 1'660 mm (closed cabin)
Interior dimensions:	Width	895 mm
	Depth	610 mm ;670 mm (without ascending sifter)
	Height	545
Weight:	approx. 170 kg	
Pressurized air connection:	G 3/4" with screw coupling. 19 mm inside diameter.	
Grid:	2-piece, carrying capacity 100 kg surface load (higher load upon inquiry).	



Sandblasting gun:	Injector principle high performance gun «Powershot» type 100, Standard equipment: Borcarbide sand nozzle + holder Ø 10 mm, Sand nozzle ceramic optional. Air nozzle made of stainless steel Ø 4 mm. Air consumption approx. 40 m³/h bei 400 kPa (4 bar) operation pressure. When using sand nozzles with smaller or larger Ø the air nozzles need to be adapted.
Gun holder:	Adjustable on all sides, mounted on full-length crossbeam.
Foot pedal:	Electrical, with protective hood IP 65.
Sand dispenser:	To regulate the sand quantity, easily removable for replacement of blasting material.
Cabin cover:	Front wall 2-piece, is pushed up vertically by 1 handle, weight balance through gas pressure springs. Cabin is accessible by crane.
Window:	Without blind spot, double glazing with attrition-proof glass, replaceable in seconds.
Lighting:	2 fluorescent pipes with 55 W, 230 V each, mounted in dust-proof cabins on the roof of the cabin.
Hand holes:	Sealed twice with wear proof special rubber (optionally with permanent rubber gloves).
Switchbox:	Dustproof, mounted on the right of the cabin, with main switch (lockable), commando switch, contactors and control fuse.
Electr. connection:	230/400 V, 50 Hz. Connecting value: kW depending on dust separator (special voltages possible).
Manometer:	In the right cabin stand, measuring range 0-1'000 kPa (0-10 bar).
Pressure reducing valve	Self-ventilating, in the right cabin stand, control range 0-900kPa (0-9 bar).
Safety switch:	Jet automatically interrupted when cabin is opened (suva conform).
Dust exhaust:	Connecting adapter at the back wall (Ø 100 mm).
Dust separator:	The Sablux-offer includes a selection of different dust separators. The right adjustment is the requirement for ideal operation of the blasting unit.

1	Manual turntable Ø 400mm, useable instead of the grid. Central capacities up to 0 kg possible..
2	Rotation drum aggregate type DK 75, drums: Ø 260mm with various hole intervals allow the economic processing of your bulk material.
3	Double rotary drum aggregate type KW75 special. To process smallest bulk material that allow only very low acceleration and process pressures for realization. Drums available in various materials and hole intervals.

Motions that adapt to your work piece and component.

The Sablux series are universal and can be adapted exactly to your needs. Gun motions are designed according to your specifications, no matter whether vertical, horizontal and/or in swivel system.

Strike lengths and version are installed outside of the cabin protected against dust according to your requirements to the units.

Gun motion





1

Gun motion with 6 nozzles in swivel system. Drive with gear engine, angle adjustable by excenter.

Outlet vales mounted on the sand blasting nozzles serve the ideal cleaning of the work pieces after blasting.



Exterior dimensions:	Width	550mm+100mm (Connections and limit switch)
	Depth	460mm+220mm (with adjoining dust separator)
	Height	810mm
Interior dimensions:	Width	545mm
	Depth	370mm
	Height	300mm (middle)
Weight:	Cabin	40 kg
	Dust separator	38 kg
	Total	78 kg

Sablux SX 60 S



Pressurized air connection:	G 1/4" Tube nipple 10 mm inner tube dimension
Sand blasting gun:	Gun Type 65. Standard equipment: Sand nozzle ceramic Ø 6mm, Air nozzle made of stainless steel Ø 2mm. Air consumption approx. 10 m ³ /h bei 400 kPa (4 bar) operation pressure. When using sand nozzles with smaller or larger Ø the air nozzles need to be adapted.
Grid:	2-piece.
Gun holder:	Mounted on swivel arm and adjustable.
Foot pedal:	Electrical.
Cabin cover:	1-piece, operator friendly, with 2 gas cylinders.
Sighting window:	Double glazing with attrition-proof glass, replaceable in seconds.
Lighting:	1 fluorescent pipe with 36W, 230 V mounted in dustproof cabin.
Hand holes:	Sealed twice with wear proof special rubber (optionally with permanent rubber gloves).
Switchbox:	Main switch (lockable), regulator and control fuse.
Electr. connection:	230 V, 50 Hz. connection approx. 200 W, grid fuse shall be provided on site.
Manometer:	Measuring range 0 – 1'000 kPa (0–10 bar).
Pressure reducing valve:	Self-ventilating, control range 0–1'000 kPa (0–10 bar).
Safety switch:	Jet automatically interrupted when cabin is opened (suva conform).
Dust exhaust:	Dust separator installed on back wall, with connecting adapter.
Dust separator:	The dust separator can be installed on the back wall or set up for example underneath the table. Keep the dust tube as short as possible.

Sablux LeanBlast 1000 S

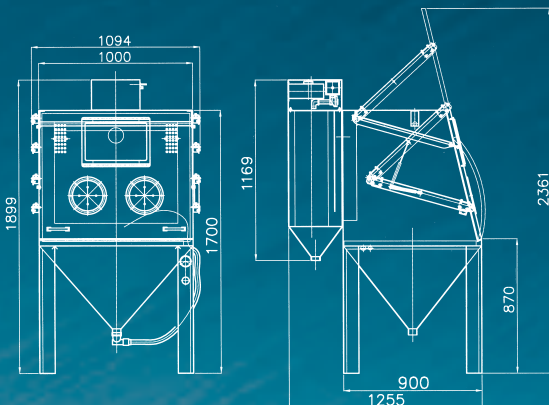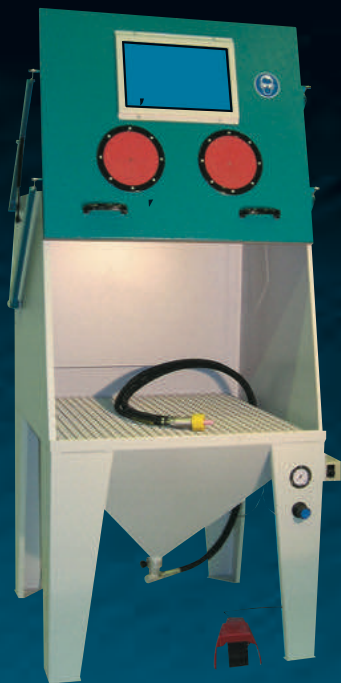

Areas of application:	Specifically adequate for small workshops, p.e.: Garages Locksmith shops Car peinting shops Repair workshops Paint shops etc.
Processable materials:	Irons Non-ferrous metals Wood Plastic Stone Glass etc.

Exterior dimensions:	Width 1125mm Depth 1250mm Height 1900mm (closed door) 2365mm (opened door)
Work room:	Width 990mm Depth 800mm Height 840mm (middle)
Weight:	210 kg
Air consumption at 4bar:	40 m ³ /h
Grid:	1-piece
Sand blasting gun:	Injector principle, «Power-shot» Type 100, Standard equipment: Sand nozzle ceramic Ø 10 mm or borcarbide sand nozzle + holder Ø 10mm. Air nozzle made of stainless steel Ø 4 mm. Air consumption approx. 40 m ³ /h bei 400 kPa (4 bar) operation pressure. When using sand nozzles with smaller or larger Ø the air nozzles need to be adapted
Gun holder:	Adjustable on all sides, mounted on full-length crossbeam
Lighting:	60 Watt.
Electr. connection:	1 x 230 V, connection value approx. 500 W
Dust exhaust:	Dust separator installed on the back, with connec- ting nozzles.
Dust separator:	Integrated on the back with 1 filter cartridge 600m ³ /h

1 Manual turntable Ø 600mm, usable instead of the grid.
Capacites up to 80 kg.

Sablux filter technology is designed for different dust types in high concentrations.

It can also be used independently of sand blasting units.

Dust separator Typ IS 852



The standard product.

The filter unit type IS 852 rounds off your unit concept, matching the sand blasting units SX 90S to SX 155S. Next to manual filter cleaning at the push of a button via integrated pressure tank, the easily useable dust drawer also belongs to the standard equipment.

Connecting value:	230 / 400V. On site pre-fuse 3 x 10A.
Usage:	In standard cabins, resp. usage of 1 injection gun.
Dimensions:	500 x 500 x 1'740 mm (Standard with dust drawer and pressure cone).
Weight:	Approx. 90 kg
Lacquer:	RAL 7035 light grey
Option:	Mobile dust container. Automatic filter cleaning (control built onto dust separator or in the switch-box of the unit).

Dust separator Typ IS 1500 | 2000



For pressure sand blasting system and | or when merging several blasting cabins.



Conectting value:	230 / 400V. On site pre-fuse 3 x 10A.
Usage:	For 3 or more injection guns or in a pressure blasting system with podium or deep pit.
Dimensions:	740x640x2050mm with dust drawer Standard 740x640x2400mm with mobile dust container as an option 740 x 640 x 2115 mm with dust drawer and pressure cone 740 x 640 x 2465 mm with mobile dust container and pressure cone
Weight:	Approx. 200 kg
Lacquer:	RAL 7035 light grey
Option:	Automatic filter cleaning (control built onto dust separator or in the switchbox of the unit)

Dust separators at a nominal suction performance of 2500 m³/h and more are evaluated custom-made for the respective unit designs. In this segment all dust separators have an automatic filter cleaning with program pre-selection and a mobile dust container on rollers for easy emptying of remaining dust. Differential pressure monitoring of the filter fleece and silencers for noise reduction round off the equipment.

Large dimension filters

Good vision for all types of work.

Dust separator PC 4/TV-H

With a very high water level, ideal for the realization of blasting processing with a cyclone.



Filter unit PC 6/8/TV

For special models with high desired nominal suction performance, for example when using several pressure machine types.

Dust separator PCex 12TV for ATEX applications.



Comparison Injector | SAD-20

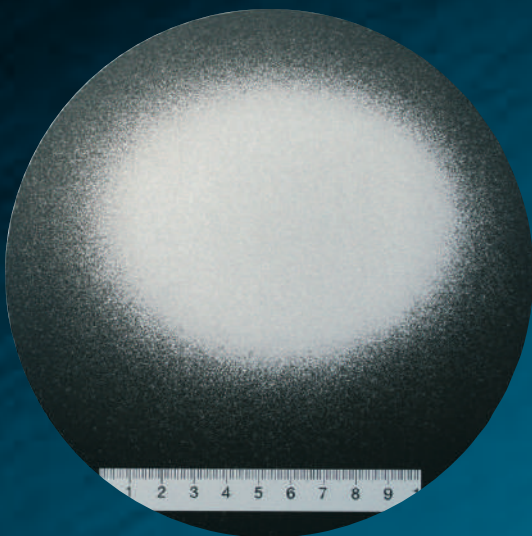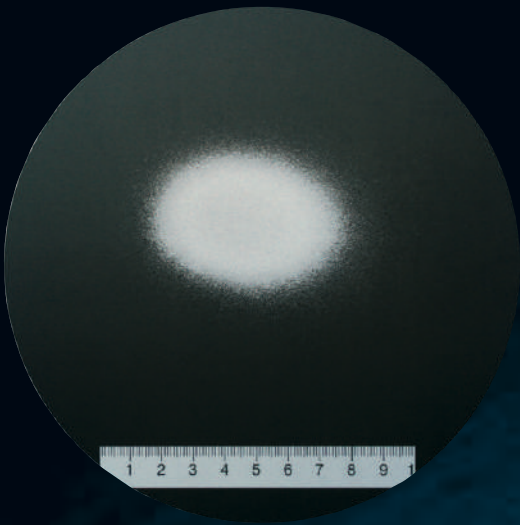

The injection system.


This is adequate for accurate and continuous blasting processes. Sablux offers the matching injector gun, also in stainless versions for different unit designs and needs.

The nozzles are made of borcarbide or ceramic, depending on the blasting materials.

Type 65

Type 100 «Power-shot»


Type 140 «Power-shot»

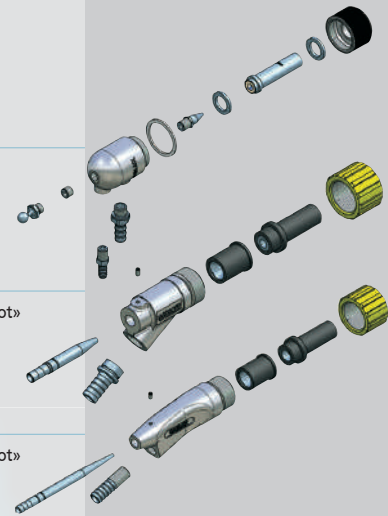

Machine:	SX 155 S
Gun:	Type 140 «Power-shot», Air nozzle Ø 5 mm, Sand nozzle Ø 11 mm
Pressure:	3 bar
Distance:	100 mm, angle 45°
Blasting material:	Normal corundum F046

The pressure blasting procedure.

Being equipped for large dimension tasks and high efficiency. Blasting material is pressurized in a tested pressure blasting pot. Dosing is done by means of a pneumatic, adjustable dosing cylinder.

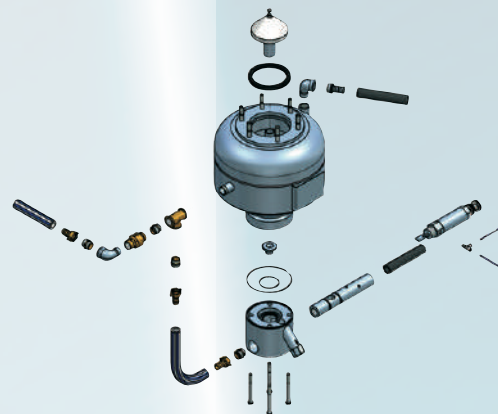

Machine:	SAD-20
Gun:	Sand tube NW 19, blasting nozzle Ø 8 mm
Pressure:	3 bar
Distance:	300 mm, angle 45°
Blasting media:	Normal corundum F046

Comparison Cyclone | Sifting plant

The cyclone.

The blasting material is cleaned from dust and soiled particles in a cyclone. The acceleration is done based on the performance of the low-pressure ventilators of the dust separator. The reusable material falls back into the storage container resp. pressure blasting pot depending on the blasting system and can be used for several circuits depending on the blasting material type. Rubber lining is recommended for protection and value maintenance of the cyclone when using abrasive material.

1

2

3



The sifting plant.

Achieving an even roughness over the entire component can only be ensured with an effective sand processing and corresponding feed units. This way the blasting material is constantly freed of interfering fine particles and contaminations. The material is additionally led over a magnetic separator that filters out damaged magnetic particles.

Sandblasting material with the corresponding oversized or undersized material is removed from the circuit. This processed, it is led back into the sand blasting process.

1

Level probes report possible blasting material shortage to the unit control.

2

Easily removable magnetic separator.


3

Separating the blasting material by fine and coarse sifter inserts (mesh width selectable by customer)


Every plastic processor knows the problem of accumulations in moulding tools. Not only the cleaning of colour pigment and filling material accumulations, but also overflowed tools and screw contaminations belong to everyday routine. Due to the usage of abrasive free blasting mediums that are available in different grain sizes, all plastic accumulations can usually be removed within in minutes without changing the structure and without damaging the engravings and parting edges. Even correctly coated pieces can be cleaned without damaging the coat.

As no chemicals are used and the surface to be cleaned is not subjected to increased temperatures, undesirable side effects can be excluded.

Xintech MasterClean XS 95



XINTECH Systems
by Sablux

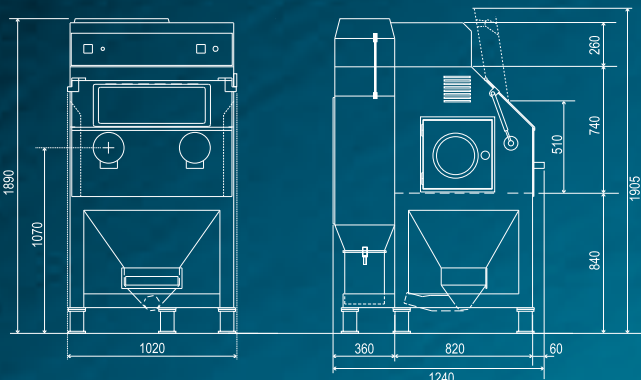

Pressure blasting units for especially high performances are used to clean coarse contaminations. The blasting medium is filled into a special pressure container and directly subjected to the incoming compressed air. Due to this technology a massive acceleration of the medium is achieved which also enables an ideal cleaning effect even for massive contaminations. The Master Clean is equipped with side opening to clean extruder screws and similarly large components, which enable these parts to fit through.

Cabin dimensions: W 1020mm, D 1230mm, H 1910mm

Work room: W 950mm, D 750mm, H 510mm

Weight approx.: 440kg

Air consumption: ± 1'350 Ltr./min. at 5 bar and blasting nozzle 5mm

Pressure range: 1–8 bar

Electrical connection: 230 V / 50 Hz (3 Ph+N+E)

Air connection: G 1/2"

Equipment:

Working grid made of perforated sheet metal, easily removable

Front safety sighting glass made of hardened glass

Replaceable, wear proof gloves, lined cover

2 side doors 410x430mm

Blasting nozzle Ø 5mm, Reducing valve and manometer 0–10 bar

Automatic pressure cabin

Integrated, automatic cabin dedusting and dust separating system with high performance cyclone

Foot pedal

Water separator

Integrated high performance filter system with 2 filter cartridges with automatic cleaning

Dust collecting container with fast lock


Door end switch

- | | |
|---|------------------------------------------------------------------|
| 1 | Mobile on rollers. |
| 2 | Side opening. |
| 3 | Integrated rotating table Ø 600mm, loading capacity up to 800kg. |
| 4 | Version with double tank. |

Automatic, absolutely abrasion-free cleaning of plastic contamination on screws & compounding elements. The constantly increasing quality standard demands innovative solutions.


Screws with a Ø of 14-180 mm can be cleaned on a length of 1-5 m (other lengths and diameters upon inquiry). The total control of blasting and transport unit is done via simple programming of cleaning processes over a touch panel. Depending on the level of contamination, up to 5 cleaning zones can be set separately. The option of manual cleaning is guaranteed.

Automatic screw cleaning unit

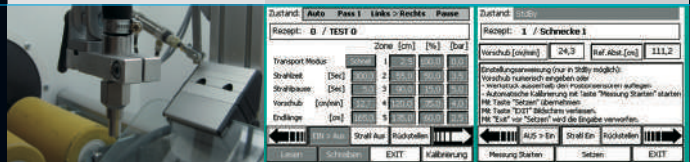


XINTECH Systems
by Sablux

Cabin dimensions	W 1020 mm, D 1230 mm, H 1930 mm
Work room:	W 950 mm, D 740 mm, H 510 mm
Total weight:	815kg
Air consumption at 4 bar and blasting nozzle Ø 5 mm:	approx. 1130l/min
Pressure range:	1.5 – 8 bar
Total connection value:	1.57kVA
Air connection:	G 1/2"
Options:	<ul style="list-style-type: none"> Acrylic cover with or without lock Dust collecting container with level monitoring Automatic refilling of blasting material by material silo (25 kg) Monitoring of automatic operation

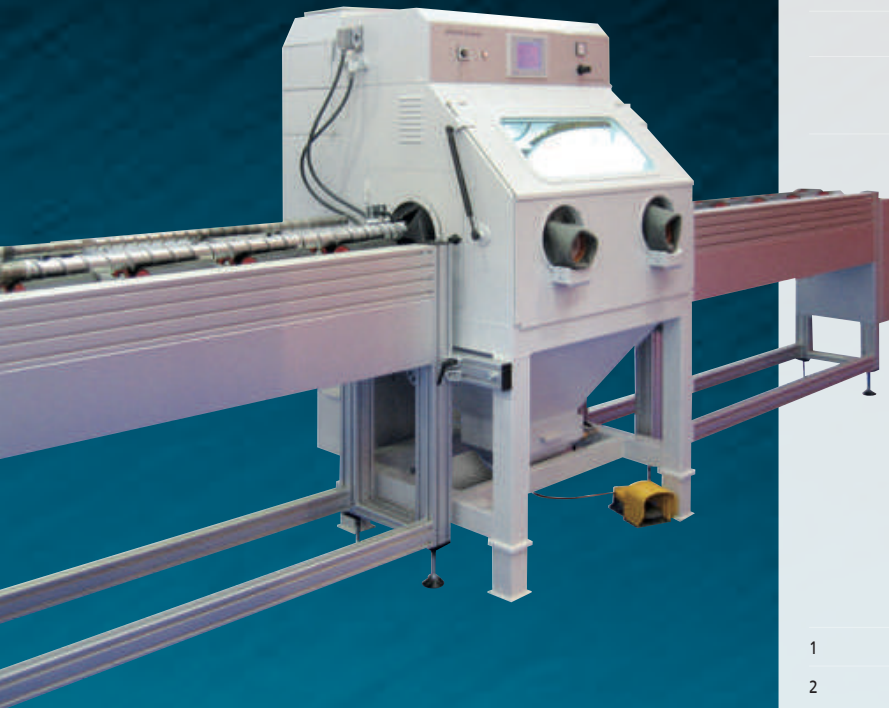



Screw-segment before and after cleaning process

- 1 Blasting nozzle with swivel motion.
 - 2 Simple programming of blasting process, screw feed, transport alignment etc.
 - 3 Cleaning program:
Automatic two-way transport of screws thanks to elaborate sensor technology
- The screw can be divided into 1 to 5 zone effective length (cm) depending on the degree of contamination, and individually programmed (blasting length/feed)
- Economic, as non-contaminated zones can be skipped (saving of time and blasting mediums).
- Automatic feed calibration.


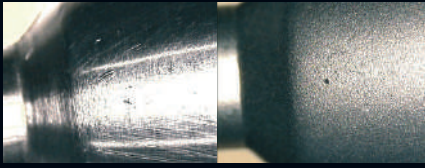


A tool core before and after two-step micro-blasting operation.

Xintech MasterFinish XS 75



XINTECH Systems
by Sablux

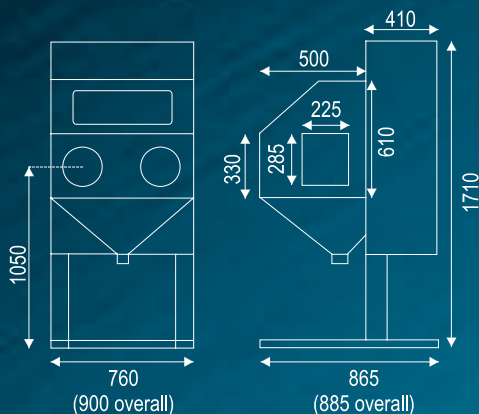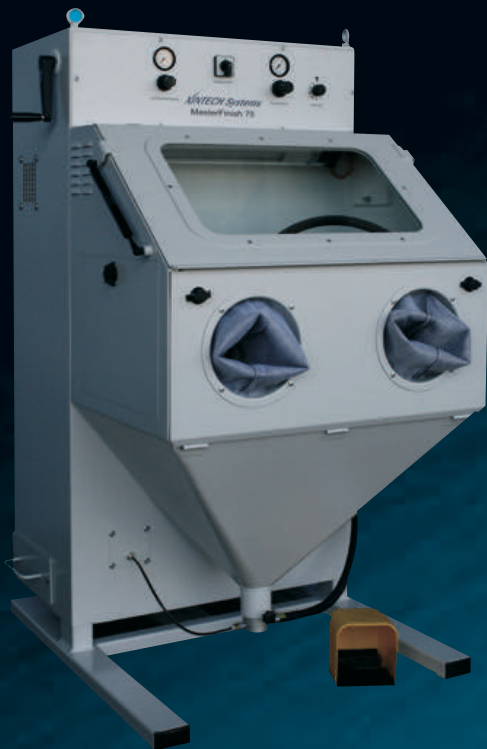

Standard Injector Micro blasting unit for optimization and homogenize of tool surfaces.

All processing of metallic surfaces leave residue, for example the «white zone» after wire or sinker erosion, or residue after grinding. Very frequently, these lead to problems in the deformability of plastic parts or contaminations due to accumulations. Due to the processing of the surfaces with the usage of micro blasting technology the tools are ideally prepared for a high productivity and lifetime. The multi level procedure used here includes defined blasting mediums, whose composition and grain size is determined according to the respective case of application. Especially in plastic processing, the quality of the article to be produced strongly depends on the surface condition of the tool.



Cabin dimensions:	W 760mm (without oil/water separator) D 865mm, H 1710mm
Work room:	W 750mm, D 500mm, Medium utilization height 500mm
Weight approx.:	150kg
Air consumption:	395l/min
Power consumption:	320W
Electrical connection:	230V/50Hz
Air connection:	G 1/4"

Equipment:

- Oil/water separator
- Inside lighting 36W
- Lateral slider left and right (Opening W 400 x H 297mm)
- Viewing window with safety glass
- Blasting nozzle hard metal Ø 5mm
- Cleaning/air outlet nozzle in the blasting cabin
- Conveyor injector unit with blasting material pre-acceleration
- Automatic blasting material processing via integrated granulate separator
- Integrated regulated filter system

- Integrated manual turntable Ø 400mm, loading capacity up to 75kg.
- Blasting medium drying system, performance adjustable via phase regulator with touch protection, 0-150 Watt.
- Manual or automatic height adjustment.
- Multiply sealed passages. They can be used instead of the lateral sliders.

Xintech DigiFinish XS 75

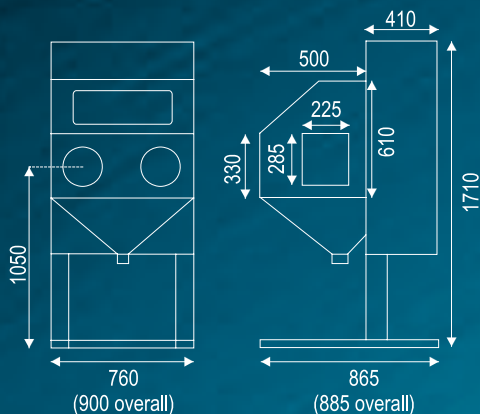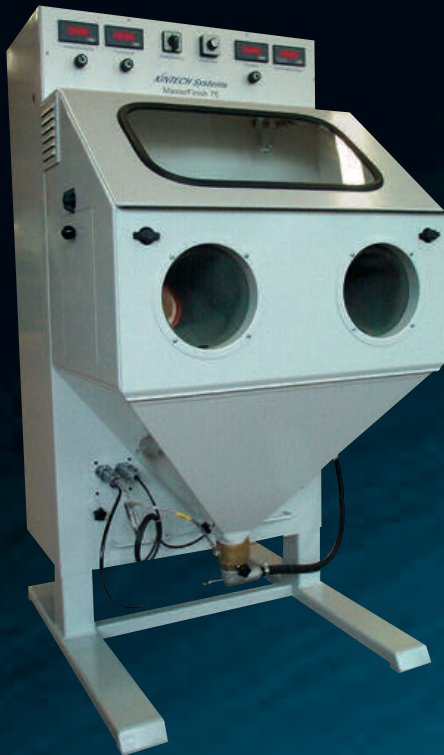


Controlled and optimized blasting process through reproducible parameters.

Regulated blasting material quantity due to digitally adjustable frequency converter.

Continuous monitoring of the effective flow quantity by means of ultrasonic flowmeter (option). Therefore no influence of the blasting material material by accumulations or moisture in the blasting material.

Digital value setting 0-6bar of the blasting pressure set by hand or as determined and object related data value as of data carrier (option).

Digitally adjustable blasting medium pre-acceleration (coupled to the cabin vacuum).

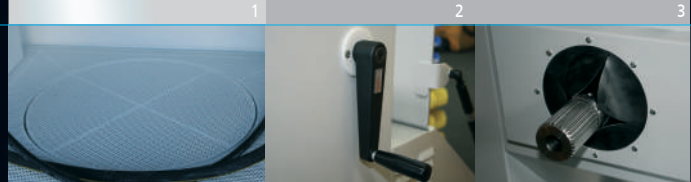

Always guarantees the same flowability thanks to blasting material drying, which works fully automatic over the digitally adjustable moisture set value.

Automatic filter cleaning over the differential pressure set value.

Significantly lower blasting material wear due to the regulated and monitored Vacuum; therefore significant cost savings and guaranteed regularity of blasting quality.

Cabin dimensions: W 760mm (without oil/water separator)
D 865mm, H 1710mm

Work room: W 750mm, D 500mm. Medium utilization height 500mm

Weight approx.: 160kg

Air consumption: 395l/min

Power consumption: 750W

Electrical connection: 230V/50Hz

Air connection: G 1/4"

Equipment:

Digital input of process parameters (process pressure, pre-acceleration pressure, vacuum, blasting material moisture)

Oil/water separator

Interior lighting 36W

Lateral slider left and right (Opening W 400 x H 297mm)

Viewing window with safety glass

Blasting nozzle hard metal Ø 5mm

Cleaning/air outlet nozzle in the blasting room

Heating system

Conveyance injector unit with blasting material pre-acceleration

Automatic blasting material processing via integrated granulate separator

Integrated regulated filter system

1 Integrated manual turntable Ø 400mm, loading capacity up to 75kg

2 Manual or automatic height adjustment

3 Multiply sealed passages. These can be used instead of the lateral sliders.

The **MicroProFinish** unit is an advanced development of the successful DigiFinish-unit. These blasting units have the following main differences:

The units only have a main switch. All other functions and statements are done via display.

The entire process as well as the individual process conditions and their condition parameters are displayed clearly structured on a colour display.



All process parameters are adjustable via the visualisation display in the corresponding symbol (touch screen).

All process parameters are monitored underneath each other in the highest and lowest range and can therefore not be adjusted falsely to each other or against each other.

The smooth height adjustment is done by tipping on the corresponding symbol on the display.

Xintech MicroProFinish XS 75

XINTECH Systems
by Sablux

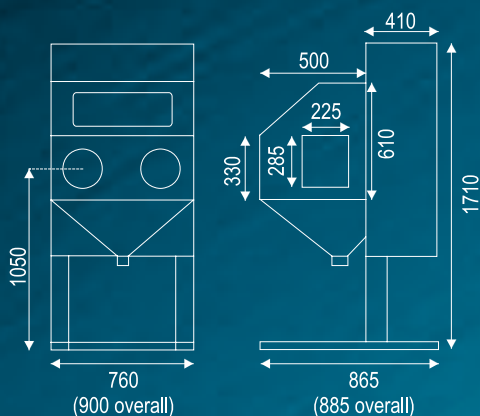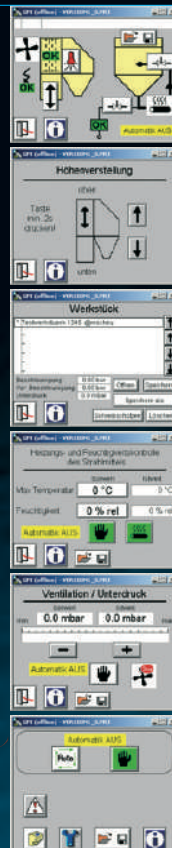

All elaborated and tested process settings can be saved directly by tipping on the symbols on the display.

Datasets saved in the unit memory can also be entered simply by tipping on the memory symbol.

The unit can only be switched on via a generated password.

With this password, the datasets can also be released individually or in packages.

The maintenance and control intervals are announced or selected on the display, relating to the effective condition of the unit.

Cabin dimensions: W 760mm (without oil/water separator)
D 865mm, H 1710mm

Work room: W 750mm, D 500mm, medium utilization height: 500mm

Weight approx.: 160kg

Air volume quantity: 395l/min

Pressure range: 0.5–10bar

Power consumption: 750W

Electrical connection: 230V/50Hz

Air connection: G 1/4"

Equipment:

Colour touch panel for all status displays

Digital entry and automatic regulation of process parameters (process pressure, pre-acceleration pressure, vacuum, blasting material moisture)

Oil/water separator

Interior lighting 36W

Lateral slider left and right (opening W400 x H 297mm)

Blasting gun hard metal Ø 5mm

Cleaning/air outlet valve in the blasting room

Heating system

Conveyance injector unit with blasting material pre-acceleration

Automatic blasting material processing via integrated granulate separator

Integrated regulated filter system

Saving datasets with password protection

Monitored process parameters

1 Integrated manual turntable Ø 400mm, loading capacity up to 80 kg

2 Multiply sealed passages. They can be used instead of the lateral sliders.



The micro blasting units XS 55 were developed as compact units to process smaller surfaces. The basic of the housing design comes from a success story of over 15 years. Beyond that, the main technical successes from the decades of experience with the 75-series were used in the new type model. In summary, this resulted in a cost effective and yet highly technical blasting device.

By using a frequency converter, the ventilator works on ideal effective level in every rotation range, which is not possible when using dimmers. The digital pressure displays for pre-acceleration and process pressure that are available as options allow clear setting and is therefore also completely reproducible in later work processes.

Xintech MasterFinish XS 55

The fine compat machine.

XINTECH Systems
by Sablux

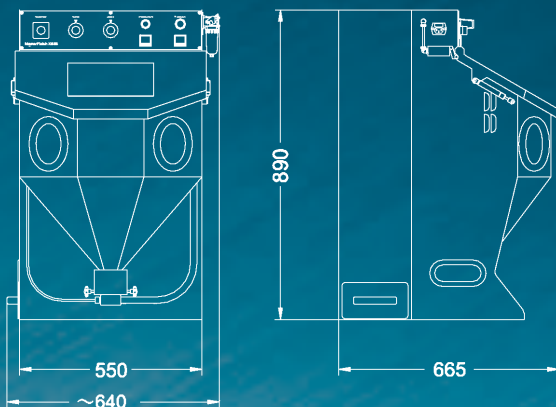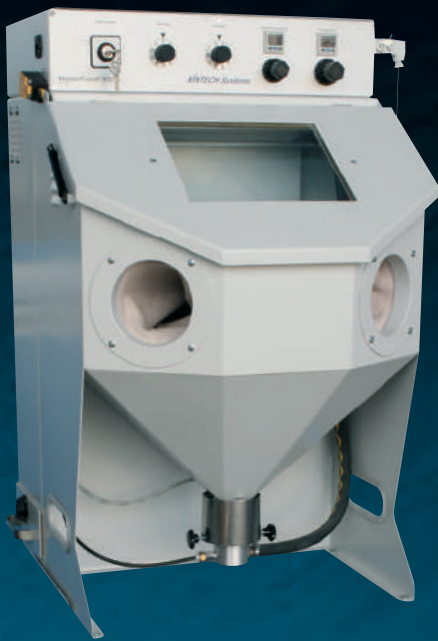

Cabin dimensions:	W 550mm, D 665mm, H 890mm
Work room:	W 545mm, W 370mm, medium utilization height 350mm
Power consumption:	230VA
Electrical connection:	230V/50Hz/60Hz
Air connection:	G 1/4"
Pressure range:	0.5–6bar (Connecting pressure minimal 6bar)

Equipment:

- Operating flap, lateral equipped with two gas pressure cylinders (opening 545mm x 300mm)
- Viewing window with replaceable frame with two screws accessible from the outside.
- Suction and filter unit, regulated via a stepless potentiometer (frequency converter), equipped with two high performance-micro filter-cartridges that are automatically cleaned pneumatically in standby and pause operation.
- Micro blasting material separation unit can be optimized over ventilator rotation.
- Outlet nozzle powered over grid pressure
- Compressed air connection including oil/water separator G 1/4"
- Impulse foot switch
- Laterally operable dust drawer made of steel
- Two-pole three level switch (zero, standby and blast)
- Two-piece perforated metal work grid with single hole diameter Ø 5mm, capacity up to 50 kg.
- Firmly screwed working gloves.
- Blasting material drying system, regulated via stepless potentiometer with touch protection, 0-150 Watt (option).
- Blasting gun with hard metal nozzle insert Ø 4mm (standard)
- Process blasting pressure adjustable from 0-6bar, pre-acceleration pressure adjustable from 0-2bar via pressure regulating valve and analogous display on the operating panel.

1	Digital pressure displays (2-colour) for pre-acceleration and process pressure (option).
2	Base for sitting or standing operation.


Satellite unit SX 140 S



Satellite-units are ideal for processing of rotating equal and/or similar work pieces. The dimension of the unit is adapted to the component, whereas the passage and the nozzle interval are the core criteria. The work pieces are led through areas that are divided into blasting and outlet sectors. The component is always led to the blasting guns and blasting in front of them. The rotating movement (satellite) is continued in the outlet sector. The selection of the material from which the unit components are made of, as well as the expansion of the processing and control guarantee the customer a concept that is exactly based on his needs and respective products. Loading resp. removing the pieces can be done either manually meaning partially automated or via handling system (robots, Pick&Place).

Image: Satellite SX 140 S with container and sifting plant.

Satellite unit SX 115 S automated

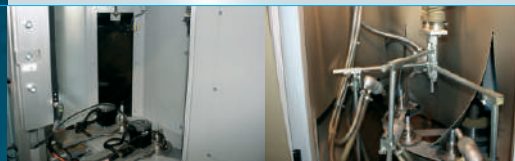

This unit has 8 blasting guns that deburr and clean the work piece in two separate blasting chambers and one separate outlet sector. The upstream handling system guarantees the necessary autonomy of the unit concept via blister procedures. In order to guarantee the positioning accuracy of the transfer station, all components like carrier, stallite plate etc. are turned after creation. Intervals are set via step-by-step motion gear. The work pieces can be processed according to defined positions so that a mechanical blasting gun is used. The parts are blasted in double cycles so that on the one hand, and increase of piece and on the other a minimization of the time can be achieved.

Robot cell



Robojober.

The project of a compact robot cell solution was developed in cooperation with our robot partner company. The concept Robojober was developed in order to be able to process components on point on the smallest floor space possible. The 5 kg robot integrated in the cell serves as handling and movement system. An optional feed-in system conveys the components to a defined retrieval position by means of component carriers. The robot retrieves the components individually and performs the desired blasting movement. In order to prevent blasting material exit, the unit possesses a pneumatic passage system. The wear proof rubber of the passage was tested specifically for this usage and further serves as protection for the robot head. After successful blasting the component is positioned at the identical carrier position and the cycle starts again.




Portal-robot blasting unit



The solution approach of a portal unit is offered in order to be able to process work pieces in several work steps with different blasting media. The process path is ensured via overhead robot. The loading and removal of the work pieces is done according to defined transport systems. Sand blasting units and the matching blasting material processing system are firmly screwed to the portal. The pneumatic passage system on the back walls of the cabins prevents blasting material from entering the interior of the unit concept. Outlet chambers clean the component between the downstream blasting processes.



Extendable turntable

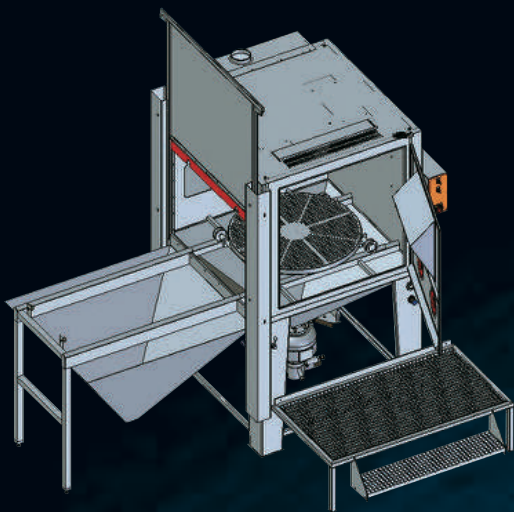

SX 140 S with extendable turntable. Optionally in injection or pressure blasting procedure.

Sand blasting cabin with extendable electrical turntable. Work pieces with a central capacity of up to 1000 kg can be loaded outside of the cabin easily accessible.

The realization of your need from the concept to the completely product.



Blasting cabin with movement range




Sand blasting cabin SX 270 S with horizontal and vertical movement range on the cabin roof.

The frame construction serves the fixation of narrow, long work pieces that have to be blasted on both sides. A pneumatic, front lift door enables ideal access to the interior of the cabin.

The stroke length of the movement ranges are adjustable, so that the economic value of the currently processed product is given.


Coordinate unit

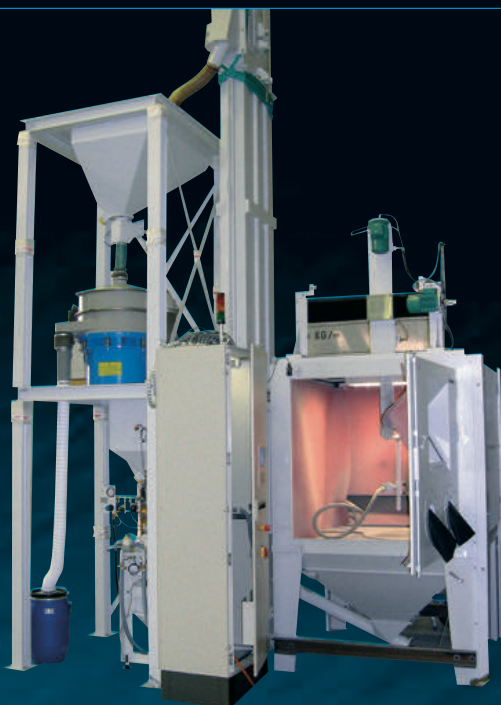

Sand blasting cabin with coordinate system and downstream round sifter unit.

Pressure blasting pots are filled continuously via a sifter tower including magnetic separation. The blasting material quantity is monitored with load cells.

Automated blasting cells

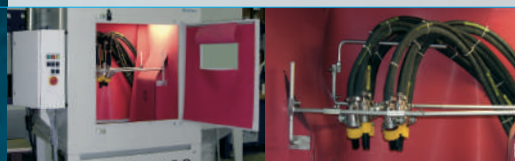


Sand blasting machine SX 120 S.

The components are lead from the side via automatic solutions into the interior of the cabin. Blasting guns guarantee an even blasting process by the defined positioning. The number of blasting guns is variable according to the component size and the interval time to be achieved. A lateral reserve silo with inlet screw guarantee the necessary autonomy. The rubber lining, made of Linatex, ensures ideal protection against wear and damages when using abrasive blasting material.


Pressure blasting unit concept

for processing several component shapes.

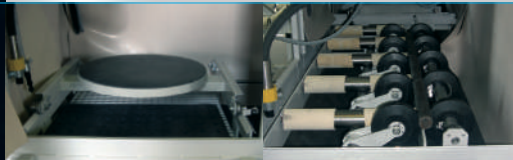

SX 300 S Pressure blasting cabin with side tables.

Two processing options via turntable or shaft drive for various work piece diameters.

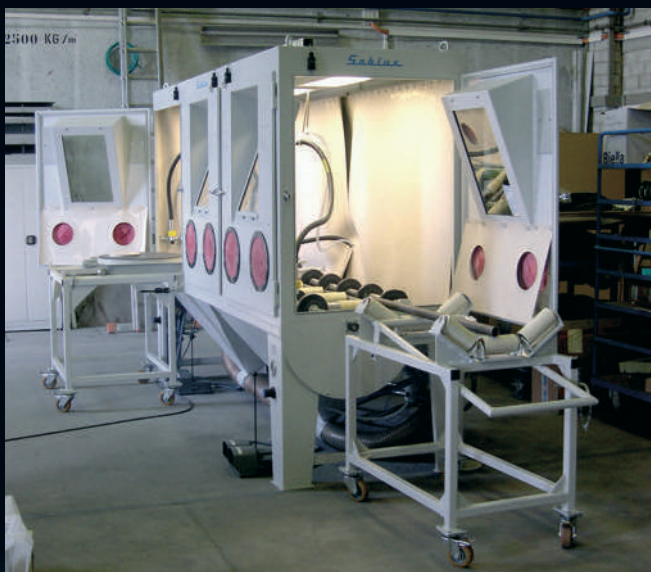

Pressure blasting unit concept



Sand blasting cabin SX 100 S.

With downstream blasting material processing of a reproducible surface roughness. Work piece processing via robots by passages conveyance screw, container, sifter and dust separator round off the equipment.

VSA-Devices



Type	VSA/C24	VSA/C 80	VSA/C 200	VSA/C 230	VSA/C 300
Pot volume in litre:	24	80	200	230	300
Length x Width x Height in mm:	470x560x830	800x850x1070	800x1000x1410	800x1000x1460	800x1060x1600
Empty weight in kg:	30	95	140	190	245
Tube length Standard/max. in m:	5/8	10/20	20/30	20/60	20/60
Required compressor performance at 7bar in litres:	1100	3500	4600	4600	7200
Blasting operating pressure max. in bar:	max. 12	max. 12	max. 12	max. 12	max. 12
Blasting capacity max. in min:	approx. 10	approx. 20	approx. 40	approx. 50	approx. 55
Hart metal valve Ø in mm:	Ø 4	Ø 7	Ø 8	Ø 8	Ø 10
Air connecting ":	Ø ¾	Ø 1	Ø 1 ¼	Ø 1 ¼	Ø 1 ¼

Our dry blasting devices are high performance pressure blasting devices. We recommend usage with protective gear and helmet (incl. fresh air supply).

Serial equipment:

Open jet devices with 8m to 60m long action range

Remote control

Safety valve

Sifter insert 3.5mm

Pressure display 0-15bar

Optional with Quick-Stop installation: Pot is kept under pressure in case of blasting interruption.

All common blasting material up to grain size of 3.5mm can be used.

VSA-devices are frequently used in the following areas:

Concrete renovation

Steel renovation

Pot cleaning processes

Application in blasting rooms

Delta



Open jet device for on point work with back absorption.

Excellent for the removal of paint residue, rust and dirt. Efficient because of the closed blasting material circle and fast blasting material exchange.

Length x Width x Height:	1100 x 500 x 1530 mm
Weight:	150 kg
Tube lengths:	Standard 5m, max. 15 m
Ventilator:	2.2 Kw, (220V)
Air consumption:	At 7 bar, 1154 l/min
Blasting pressure:	Max. 12 bar
Blasting nozzle:	Ø 4 mm (hard metal)
Blasting material capacity:	25 kg

Blasting rooms | Container



Equipped for large-dimension work.

Blasting rooms in robust modular system are designed, dimensioned and mounted according to the size desired by the customer

The corresponding conveying, processing and filter systems round off the unit concept.



The compact blasting room.

The solution approach of a blasting container is based on the flexibility, the compactness and the economics of a smaller blasting room concept.

Compactness.

Larger work pieces can also be realized in compact dimensions thanks to the offer of various container dimensions.

Economic value.


The omission of the conveyor units and the standard modular concept form an economically interesting unit concept.



Flexibility.

Blasting device and dust separators are integrated on the backside of the blasting container, separated from the blasting room. The selection of the location of the blasting container is therefore flexible and changeable.

Special products

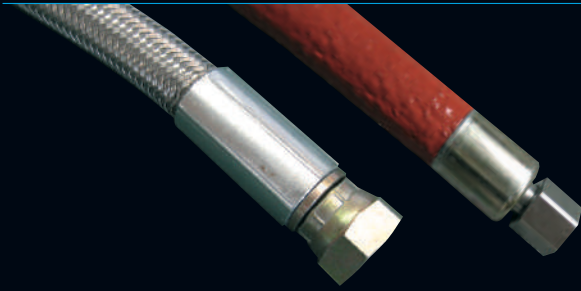

Tubes.

We also deliver highly flexible, low-wear tubes in the sector of cooling and air conditioning systems that are designed for temperature up to 260°C

Low-wear, as there is no direct friction. Glass fibre serves as intermediate layer between steel cover and material. The length finishing is one in-house according to your wishes.

Special products



Quick couplings in brass and stainless steel.

We deliver all necessary fittings in brass in the field of cooling and temperature control system (all nipple types are available in rust free steel). The profiles and the dimensions are compatible with most systems on the market. Our fabrication is equipped with state-of-the-art production machines and allows the manufacture of customer-specific versions. In order to prevent personal injury, we recommend using the XINTECH safety couplings for material temperatures 80°C and more.

The insertion connection cannot be separated without the unlocking function. This way, unintentional decoupling (for example due to impact) is not possible.



Vacuum devices.

Reasons for using vacuum for injection moulding:


- No air inclusions
- No burnings (Diesel effect)
- No burr formation
- Maximized flow paths
- Reduced injection pressure
- Lower tool strain
- Unfalsified illustration of the cavity surface

	Gammavac 15	Gammavac 25
Pump:	P6010 Si32-3X4	P6010 Si32-3X4
Air (compressed air):	4 – 6bar (1/2" minimum passages 9 mm)	
Tank content (depending on use):	0 – 10 Liter (2 litres modular)	0 – 10 Liter (2 litres modular)
Dimensions(WxHxD):	500 x 300 x 450 mm	500 x 300 x 450 mm
Weight:	21 Kg without tank	22 Kg without tank
Vacuum connections:	1" free passageway (min. 24 mm)	
Vacuum measurement line:	3 mm Test 15 (keep measuring line as short as possible)	
Interface:	Potential free	Potential free (EUROMAP optional)
Operation:	Command over button	Touchscreen
Connection:	230V 50/60 Hz 1.0 A	230V 50/60 Hz 1.0 A

The hereafter described blasting materials are available in stock.

If your desired blasting material is not listed please contact us.

Sablux blasting material

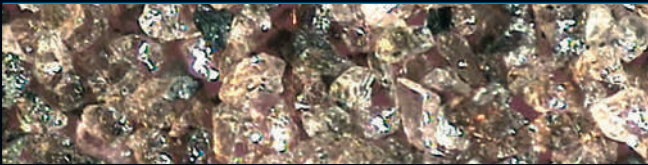

Corundum 70-fold magnification (edged grain)



Plastic granulate 70-fold magnification (edged, soft grain)


Abrasive blasting material	Depending on the surface material and the result to be achieved different blasting material is used.
Areas of application:	General cleaning, roughening and pre-treatment of the surface
	Removal of residues like paint, scale, corosions etc.
	Structuring a surface
	Achievement of a desired surface roughness
	Inscribing and satin finishing
Blasting material selection:	Electro corundum special fused
	Electro corundum
	Broken glass
	Silicium carbide
	Brass powder
Soft, edged blasting material	While metal often require blasting material in a similar composition, the plastic branch and mould manufacturers use soft edged blasting materials like Duroplaste or vegetable blasting media (nutshtell granulate). Cleaning is done abrasion-free and is therefore very gentle to the basic material.
Areas of application:	Cleaning of plastic covers on screws & compounding elements
	Cleaning of coverings in mould manufacture
	Cleaning of soot accumulation in combustion engines etc.
Blasting media selection:	Plastic pellets
	Nutshell granulate

Non-abrasive blasting media

In surface refining, blasting is done with round grain. This produces a finer surface. Next to glass beads and ceramic beads, ferrite and stainless steel beads may also be used.

Areas of application: Matting, smoothing and compressing of surfaces
Surface hardening (Shot-Peening)
Reshaping and sealing a surface
Surface finish

Blasting media: Glas beads
Ceramic beads
Steel balls

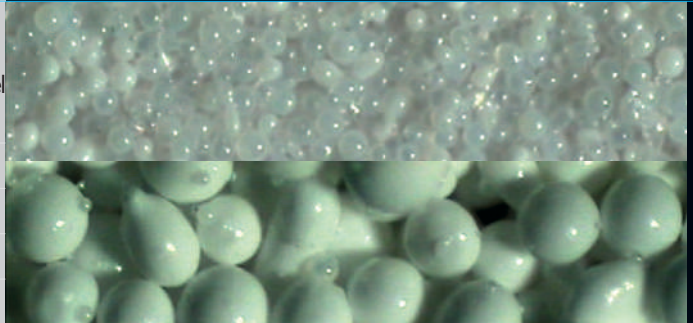

Top: Glas pearls 160-fold magnification (ball shaped)
Bottom: Ceramic pearls 160-fold magnification (ball shaped)


Hard materials

We recommend using hard material to seal and increase skid-proofness

Areas of application: Usage on stairs, industrial floors and for improving wear-resistance on road surface.



Protect yourself against unwanted surprises in your blasting process. We are gladly advise you and deliver ex factory in Bachenbülach.

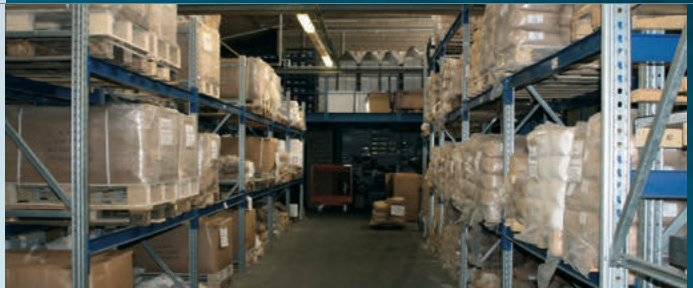

Full Service



«It's easier to try than worry about it»

Our ready-to-use test blasting room is available for your practical tests.

We have all common blasting media in various grain sizes available.

Spare parts - even for units that have been in use for over 30 years.

Wide blasting media assortment.

Maintenance and repair service - also for systems of other manufactureres.

Consulting, designing, construction, final assembly and start up of individually produced high performance units.

Sablux sandblasting units are characterized by functionality, high performance and long lifetimes.


Benefit from our specialist competence and our strengths.

Sandblsting technolgy in a one-stop-shop in typical Swiss quality.

Our business customers and partners within and outside of the country value our Sablux quality.

For over 50 years.



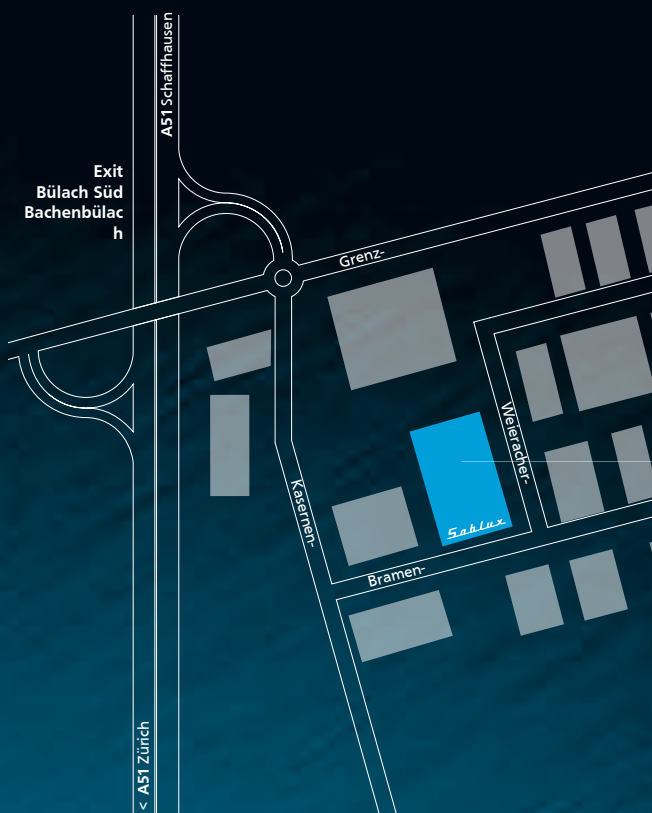

Our sales and construction offices, administration, test laboratory and assembly halls are located close to Zurich (at the airport) at the autobahn exit «Bülach Süd | Bachenbülach».

Sablux Technik AG

Bramenstrasse 14
CH-8184
Bachenbülach

Tel. +41 43 411 44 22
Fax +41 43 411 44 23
www.sablux.ch

[Sandblasting technology](#)

[Unit construction](#)

[Metalworking](#)

[Engineering](#)

[Micro blasting technology XINTECH](#)

Member:

Swiss metal union:



Certification:



Representation:

Sablux Technik AG

Bramenstrasse 14
CH-8184
Bachenbülach

Tel. +41 43 411 44 22
Fax +41 43 411 44 23
www.sablux.ch

Sablux

The fine difference